
MODEL **PANEL DECOR 100**

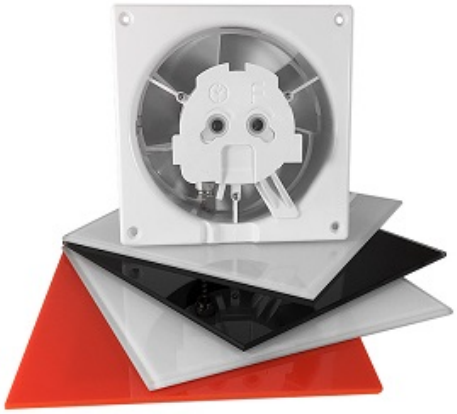

Ventilador mural

PANEL DECOR es la perfecta combinación entre diseño e ingeniería que nos brinda confort a un siguiente nivel. La serie PANEL DECOR presenta un innovador diseño dentro de la gama de productos de uso
doméstico. Ventilador axial moderno y compacto para aplicaciones como aseos, baños, cocinas, habitaciones pequeñas y medianas. Con válvula antirretorn.

INFORMACIÓN TÉCNICA DEL PRODUCTO

Caudal max	92,47	m3/h
Presión estática max	25,34	Pa
Diámetro	100	mm
Equilibrado	Q6.3 DINÁMICA	
Material hélice		ABS
Material envolvente		ABS
Peso aproximado		1 kg
Potencia mecánica	8,00	W
Intensidad nominal	0,06	A
Velocidad nominal	2.400	rpm
Presión acústica	26	db(A)

Características


- Para la ventilación continua o intermitente de baños, duchas, cocinas, etc.
- El ventilador incluye de serie una válvula antirretorno.
- Panel frontal de cristal fácilmente desmontable y con variedad de colores.
- El grado de protección es IPX2 y el motor incorpora un protector térmico.
- El motor incorpora rodamientos de bolas de larga duración y sin mantenimiento que garantizan hasta 40.000 h de uso continuo.

NOVOVENT reserves the right of change any design (including drawings, materials and specifications) and is the sole owner of the software development, not accepting mistakes that could happen because of a faulty installation or based on a non updated version of software. Information given on this data sheet is for this specific fan being highly recommended to refer and follow the project requirements and instructions. This data sheet has been printed on 08/09/2022 using software version 2017. Sound data are given under laboratory conditions and may differ from operation and mounting conditions. Use this sound data as a reference only. Drawings are for dimensional purposes only. Start currents are DOL for motors power below 4kW and above are Star Delta.


Fenoplastica Lights Electrics, S.L. - ESB65480543 C/AMADEU VIVES 8, 08440 CARDEDEU, SPAIN
TEL. +34 938 444 820 || fenoplastica@fenoplastica.com

PANEL DECOR 100

PRESTACIONES DEL VENTILADOR
(presión y potencia mecánica en función del caudal en condiciones normales T20ºC y 1,2046kg/m3 densidad del aire)

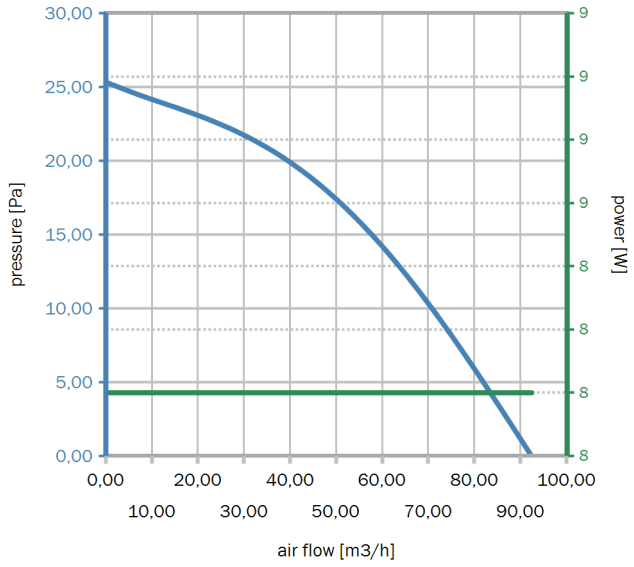

DIMENSIONES DEL PRODUCTO

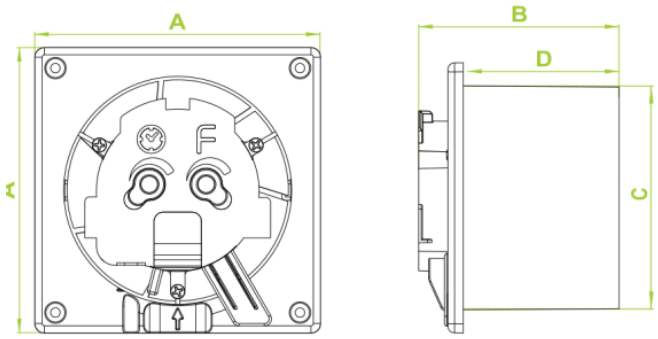


[mm]	dRim Ø 100	dRim Ø 125
A	120	145
B	89	89
C	100	125
D	69	69

ACCESORIOS

NOVOVENT reserves the right of change any design (including drawings, materials and specifications) and is the sole owner of the software development, not accepting mistakes that could happen because of a faulty installation or based on a non updated version of software. Information given on this data sheet is for this specific fan being highly recommended to refer and follow the project requirements and instructions. This data sheet has been printed on 08/09/2022 using software version 2017. Sound data are given under laboratory conditions and may differ from operation and mounting conditions. Use this sound data as a reference only. Drawings are for dimensional purposes only. Start currents are DOL for motors power below 4kW and above are Star Delta.

Fenoplastica Lights Electrics, S.L. - ESB65480543 C/AMADEU VIVES 8, 08440 CARDEDEU, SPAIN
TEL. +34 938 444 820 || fenoplastica@fenoplastica.com

MODEL **PANEL DECOR 120**

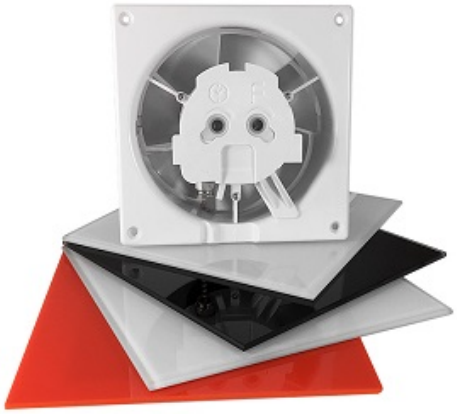

Ventilador mural

PANEL DECOR es la perfecta combinación entre diseño e ingeniería que nos brinda confort a un siguiente nivel. La serie PANEL DECOR presenta un innovador diseño dentro de la gama de productos de uso
doméstico. Ventilador axial moderno y compacto para aplicaciones como aseos, baños, cocinas, habitaciones pequeñas y medianas. Con válvula antirretorn.

INFORMACIÓN TÉCNICA DEL PRODUCTO

Caudal max	142,89	m3/h
Presión estática max	37,04	Pa
Diámetro	120	mm
Equilibrado	Q6.3 DINÁMICA	
Material hélice		ABS
Material envolvente		ABS
Peso aproximado		1 kg
Potencia mecánica	10,00	W
Intensidad nominal	0,07	A
Velocidad nominal	2.400	rpm
Presión acústica	34	db(A)

Características


- Para la ventilación continua o intermitente de baños, duchas, cocinas, etc.
- El ventilador incluye de serie una válvula antirretorno.
- Panel frontal de cristal fácilmente desmontable y con variedad de colores.
- El grado de protección es IPX2 y el motor incorpora un protector térmico.
- El motor incorpora rodamientos de bolas de larga duración y sin mantenimiento que garantizan hasta 40.000 h de uso continuo.

NOVOVENT reserves the right of change any design (including drawings, materials and specifications) and is the sole owner of the software development, not accepting mistakes that could happen because of a faulty installation or based on a non updated version of software. Information given on this data sheet is for this specific fan being highly recommended to refer and follow the project requirements and instructions. This data sheet has been printed on 08/09/2022 using software version 2017. Sound data are given under laboratory conditions and may differ from operation and mounting conditions. Use this sound data as a reference only. Drawings are for dimensional purposes only. Start currents are DOL for motors power below 4kW and above are Star Delta.


Fenoplastica Lights Electrics, S.L. - ESB65480543 C/AMADEU VIVES 8, 08440 CARDEDEU, SPAIN
TEL. +34 938 444 820 || fenoplastica@fenoplastica.com

PANEL DECOR 120

PRESTACIONES DEL VENTILADOR
(presión y potencia mecánica en función del caudal en condiciones normales T20ºC y 1,2046kg/m3 densidad del aire)

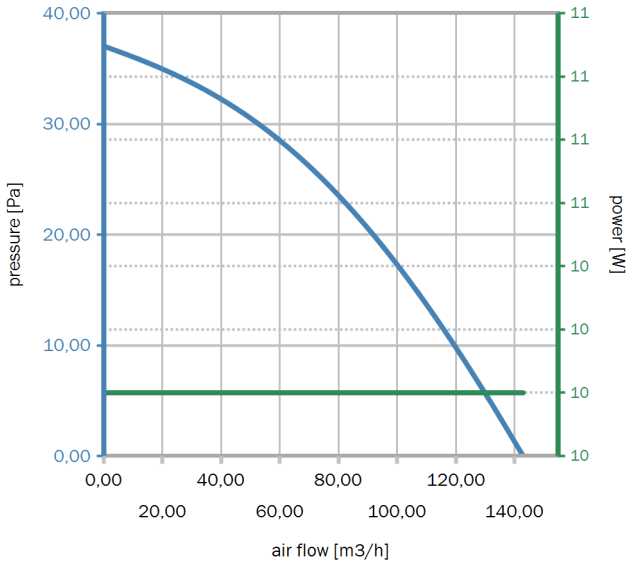

DIMENSIONES DEL PRODUCTO

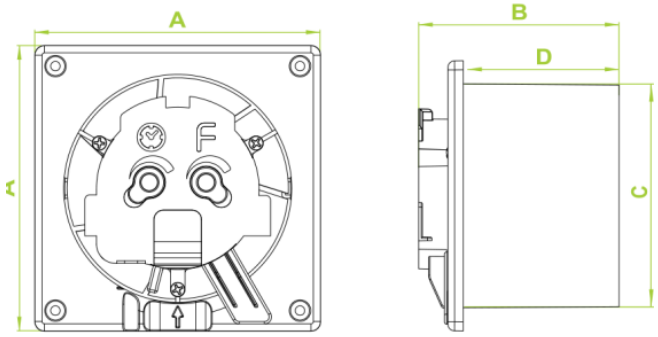

[mm]	dRim Ø 100	dRim Ø 125
A	120	145
B	89	89
C	100	125
D	69	69

ACCESORIOS

NOVOVENT reserves the right of change any design (including drawings, materials and specifications) and is the sole owner of the software development, not accepting mistakes that could happen because of a faulty installation or based on a non updated version of software. Information given on this data sheet is for this specific fan being highly recommended to refer and follow the project requirements and instructions. This data sheet has been printed on 08/09/2022 using software version 2017. Sound data are given under laboratory conditions and may differ from operation and mounting conditions. Use this sound data as a reference only. Drawings are for dimensional purposes only. Start currents are DOL for motors power below 4kW and above are Star Delta.