

*CH22x58 gG 50A/500V



Specifications

ETI Code	002640019
Description	*CH22x58 gG 50A/500V
Class name	Fuse link
Rated current (A)	50
Type	CH
Size	22x58
Characteristics	gG
Rated AC voltage (V)	500
Breaking capacity AC (kA)	120
Power dissipation (W)	7,7
Standards	IEC 60269-1, IEC 60269-2
Application	For cable protection
efuse	1

[Online product page](#) 

Other documentation



[Technical data catalogue](#)

[3D Model](#)

[Instruction manual](#)

[CE declaration](#)


[Eplan file](#)

ETIM international clasification


Classification	EC000035
Class name	Miniature fuse
Rated current	50A

Melting energy characteristics


Melting energy
characteristics I^2t
CH22

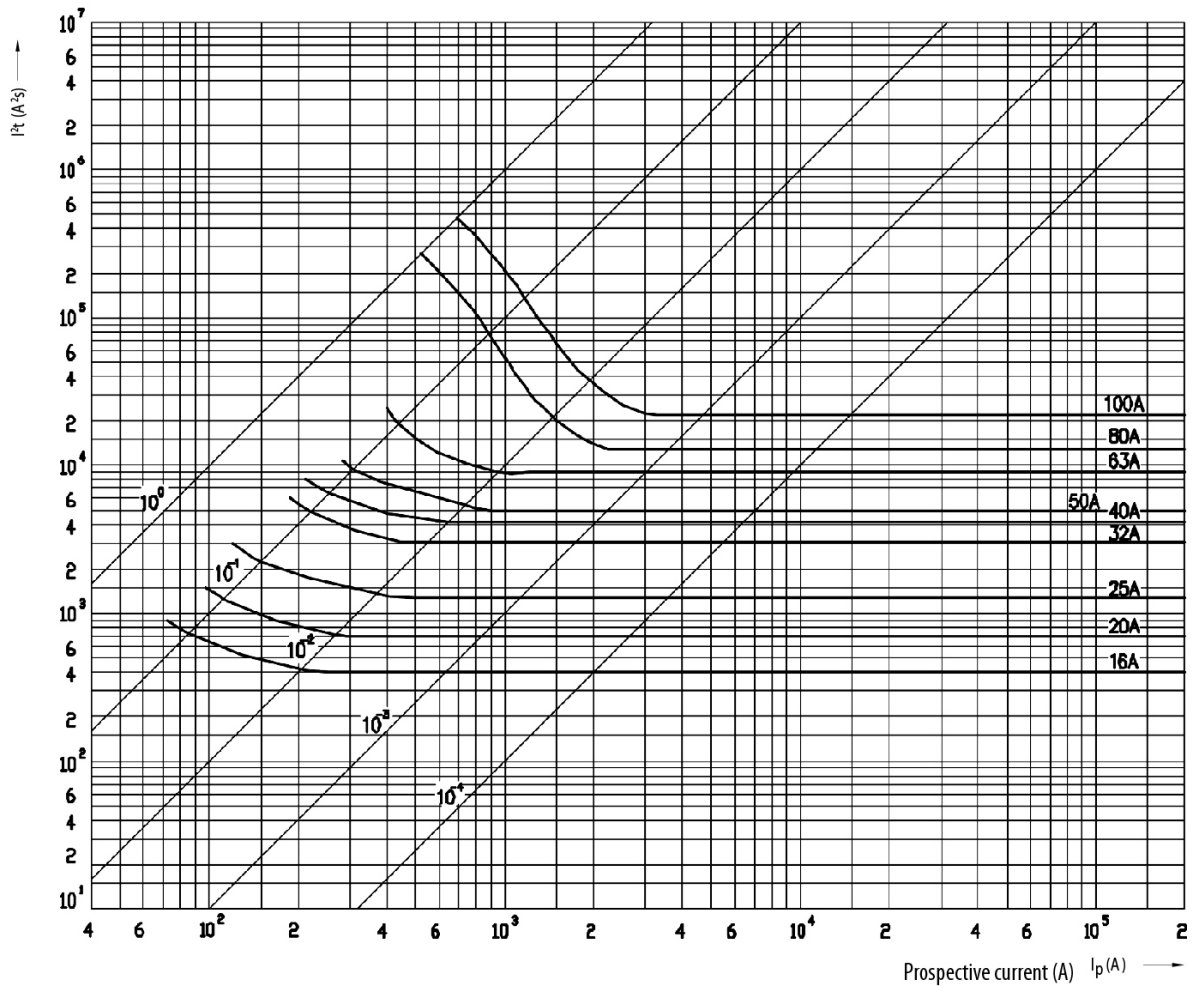

Characteristics

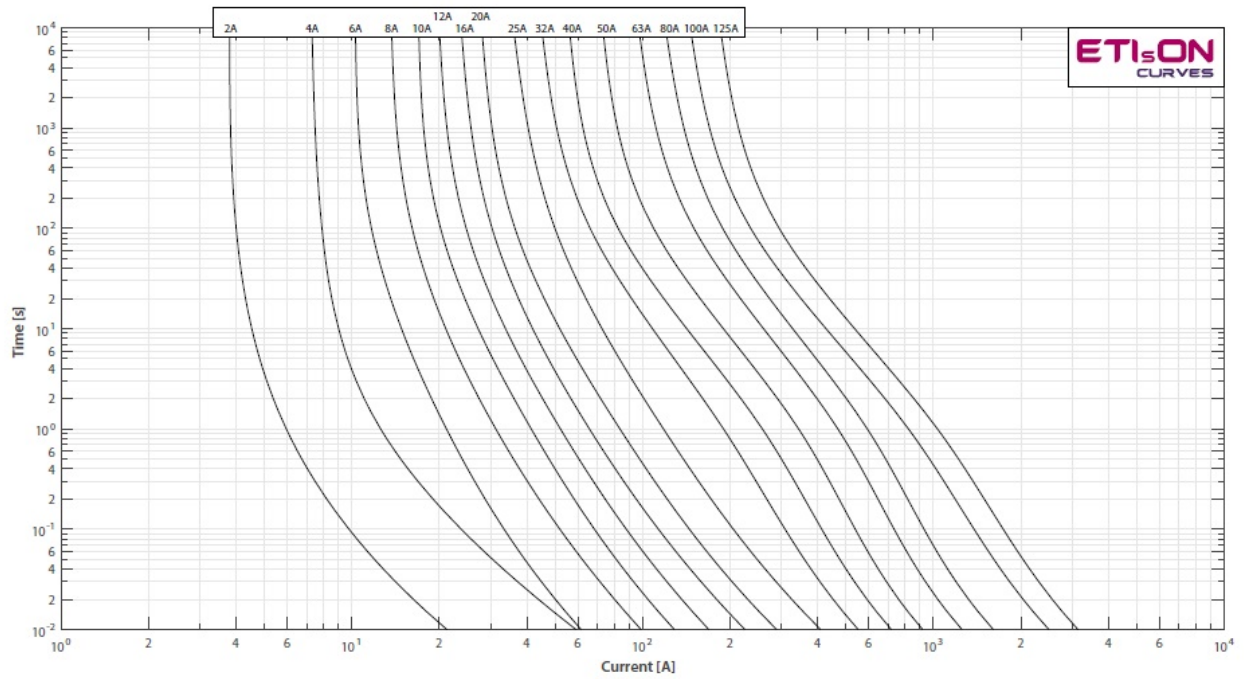

Dimension drawing

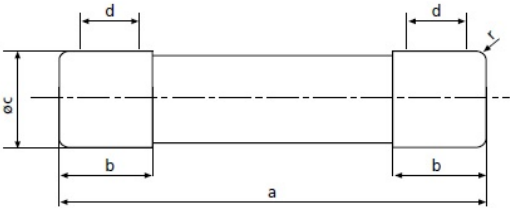

size	a	b _{max.}	c	d _{min.}	r
8 x 32	31,5±0,5	6,7	8,5±0,1	4	1±0,5
10 x 38	38,0±0,6	10,5	10,3±0,1	6	1,5±0,5
14 x 51	51,0+0,6/-1	13,8	14,3±0,1	7,5	±1
22 x 58	58,0+0,1/-2	16,2	22,2±0,1	11	±1

